



Dwg. KG4.4.1.20

Model KG4 B
Version 1.01
23 Oct 2017


C Pemberton-Pigott

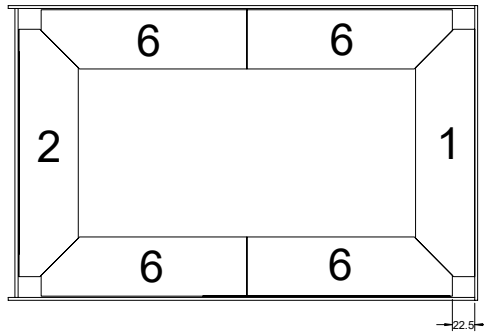


Bottom
Row

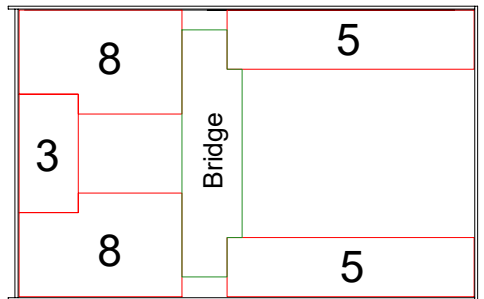

Second
Row

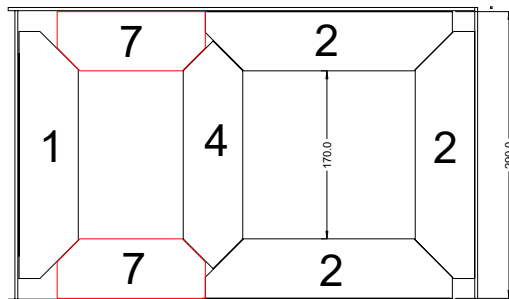

Third
Row

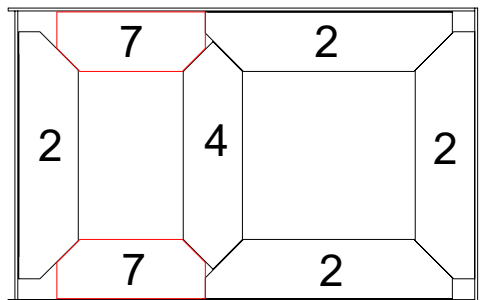

Other
Rows

BRICK INSTALLATION

Note: The back of the chamber is welded on after the bricks are installed.

This ensures the bricks fit exactly and easily.

Push the bricks forward using the back plate then weld it into position.

Use a pre-cut bar of appropriate length propped against the end wall to push the plate towards the bricks.